


# コアードモータ \*スパーギア φ37\* KZシリーズ

TP-3326※-KZ-□□□-A000-24

## ■ 外観図

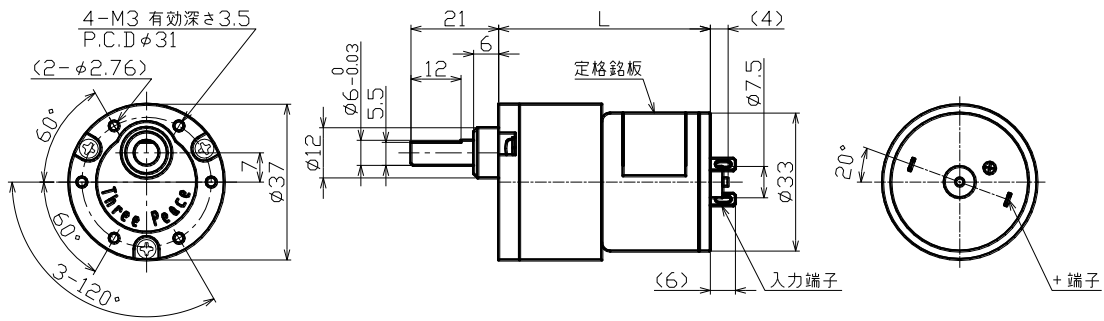

## ■ モータ仕様

機種名 Model name	電圧 Voltage	無負荷(No-load)		定格(Rated)				起動(Starting)			
		回転数	電流	出力	トルク		回転数	電流	トルク		電流
		Speed	Current	Output	Torque		Speed	Current	Torque		Current
TP-3326 A	24.0	5,000	21.0	1.72	3.92	40.0	4,200	104.0	24.5	250.0	0.5
TP-3326 B	24.0	7,230	34.0	2.56	3.92	40.0	6,240	157.0	36.8	375.6	0.9
TP-3326 C	24.0	10,090	54.0	3.75	3.92	40.0	9,140	240.0	41.6	424.8	2.0
TP-3326 D	12.0	4,515	40.0	2.01	5.10	52.0	3,760	246.0	30.5	311.0	1.3

## ■ TP-3326A-KZ-□□□-A\*\*\*-24

減速比 Ratio	無負荷(No-load)			定格(Rated)				起動(Starting)			方向 +印加	長さ Length
	回転数	電流	出力	トルク		回転数	電流	トルク		電流		
	Speed	Current	Output	Torque		Speed	Current	Torque		Current		
1/**	r/min	mA	W	Nm	kgf·cm	r/min	mA	Nm	kgf·cm	A		mm
10	490.0	21.0	1.3	0.03	0.3	417.4	98.0	0.20	2.0	0.54	CW	44.7
30	163.3	21.0	1.1	0.08	0.8	139.4	97.0	0.54	5.5	0.54	CCW	47.2
50	98.0	21.0	1.1	0.13	1.3	82.5	103.0	0.80	8.2	0.54	CW	49.7
100	49.0	21.0	1.1	0.25	2.5	41.5	100.0	1.61	16.4	0.54	CW	49.7
200	24.5	21.0	0.7	0.29	3.0	22.0	74.0	2.90	29.6	0.54	CCW	52.2
300	16.3	21.0	0.5	0.29	3.0	15.2	56.0	4.34	44.3	0.54	CCW	52.2
450	10.9	21.0	0.3	0.29	3.0	10.3	47.0	5.85	59.7	0.54	CW	54.7
900	5.4	21.0	0.2	0.29	3.0	5.3	34.0	11.71	119.5	0.54	CW	54.7

## ■ TP-3326C-KZ-□□□-A\*\*\*-24

減速比 Ratio	無負荷(No-load)			定格(Rated)				起動(Starting)			方向 +印加	長さ Length
	回転数	電流	出力	トルク		回転数	電流	トルク		電流		
	Speed	Current	Output	Torque		Speed	Current	Torque		Current		
1/**	r/min	mA	W	Nm	kgf·cm	r/min	mA	Nm	kgf·cm	A		mm
10	988.8	54.0	2.8	0.0	0.3	902.6	226.0	0.34	3.4	2.03	CW	44.7
30	329.6	54.0	2.5	0.1	0.8	301.2	224.0	0.91	9.3	2.03	CCW	47.2
50	179.3	54.0	2.4	0.1	1.3	179.3	238.0	1.37	13.9	2.03	CW	49.7
100	98.9	54.0	2.3	0.2	2.5	90.0	231.0	2.73	27.9	2.03	CW	49.7
200	49.4	54.0	1.4	0.3	3.0	46.5	172.0	4.92	50.2	2.03	CCW	52.2
300	33.0	54.0	1.0	0.3	3.0	31.6	133.0	7.38	75.3	2.03	CCW	52.2
450	22.0	54.0	0.7	0.3	3.0	21.3	112.0	9.95	101.5	2.03	CW	54.7
900	11.0	54.0	0.3	0.3	3.0	10.8	83.0	19.90	203.0	2.03	CW	54.7

## ■ TP-3326D-KZ-□□□-A\*\*\*-12

減速比 Ratio	無負荷(No-load)			定格(Rated)				起動(Starting)			方向 +印加	長さ Length
	回転数	電流	出力	トルク		回転数	電流	トルク		電流		
	Speed	Current	Output	Torque		Speed	Current	Torque		Current		
1/**	r/min	mA	W	Nm	kgf·cm	r/min	mA	Nm	kgf·cm	A		mm
10	442.5	40.0	1.5	0.04	0.4	372.2	236.0	0.25	2.5	1.27	CW	44.7
30	147.5	40.0	1.4	0.11	1.1	123.6	239.0	0.67	6.8	1.27	CCW	47.2
50	88.5	40.0	1.3	0.17	1.7	73.7	245.0	1.00	10.2	1.27	CW	49.7
100	44.2	40.0	1.2	0.29	3.0	37.7	221.0	2.00	20.4	1.27	CW	49.7
200	22.1	40.0	0.6	0.29	3.0	20.3	141.0	3.60	36.8	1.27	CCW	52.2
300	14.7	40.0	0.4	0.29	3.0	13.9	107.0	5.40	55.1	1.27	CCW	52.2
450	9.8	40.0	0.3	0.29	3.0	9.4	90.0	7.28	74.3	1.27	CW	54.7
900	4.9	40.0	0.1	0.29	3.0	4.8	65.0	14.56	148.6	1.27	CW	54.7